



GeoKam[®] E-Line Datasheet

Digital Imagery Components with the most Advanced Image Optimization Algorithms

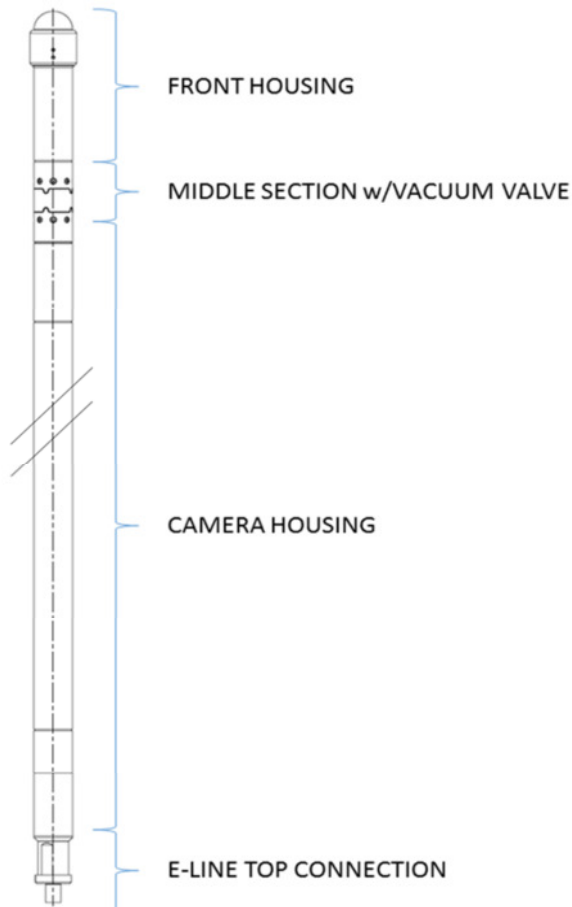


Technical

- Pressure (max) 10.000 psi / 690bar
- Temperature 125 °C
- Tool Diameter (in) 2,25
- 5Mpx DIGITAL CMOS Image Sensor
- 185/360° Field of View
- 5 HD frames per second
- 128 GB Memory Capacity in Tool
- Thread top GO 1 3/16"
- Operating voltage + 105V - 600V DC
- Length (m) 1,83
- Weight in air (kg) 15
- Vacuum Valve for PCB isolation
- ex II 3G Ex nC T1 – explosion proof in accordance with guideline 94/9/EG



185/360° Field of View covering the whole bore; Full downward and side view looking in one seamless Image

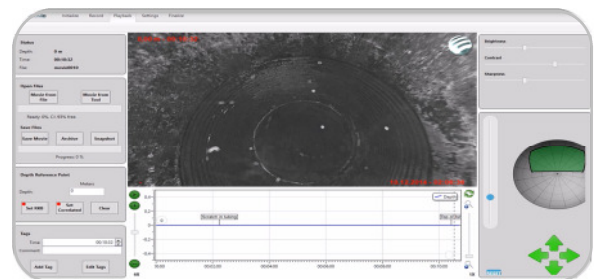

The WellViewer software is used on all cameras, giving you the best post processed



BRG Brunnen-Regenerierungs und Brunnenprüfdienst GmbH

Lohberggasse 3
D-84172 Buch am Erlbach

Telefon: +49 (0) 87 09/92 83 93
Telefax: +49 (0) 87 09/92 83 94

eMail: brg@brunnentv.de
www.brunnentv.de